



EN ISO 9001:2000

GMP

K E T I



# Deltaclave Series 200/410/600



- 1 -

**AMS** DELTA MEDICAL SYSTEM

## ● SPECIFICATIONS

MODEL		SERIES 200	SERIES 410	SERIES 600
Overall Size		500(W) × 370(H) × 640(L)mm	580(W) × 430(H) × 640(L)mm	620(W) × 480(H) × 840(L)mm
Chamber	Size	∅ 250 × 450(L)mm	310(W) × 310(H) × 450(L)mm	∅ 350 × 650(L)mm
	Type	Cylindrical	Rectangular	Circular
	Material	Stainless Steel		
	Capacity	22 l	43 l	63 l
Heater	power	1.5 KW	2.2 KW	2.7 KW
	Material	Alloy		
Tray	Size	214(W) × 30(H) × 443(L)mm 3EA	300(W) × 50(H) × 410(L)mm	252(W) × 610(L)mm
	Material	Stainless Steel		
Sterilization	Temperature Range	110°C~135°C (230°F~275°F)		
	Course	4 Kind		
Reservoir Capacity		5 l	5 l	7 l
Dry System		F.A.S.E. System		
Control System		Microprocessor		
Safety Device		Safety Valve, Thermostat, N/O Solenoid Valve		
Door Lock System		Mechanical CAM Type		
Power Consumption		AC 220V, 50/60 HZ, 1.5KW	AC 220V, 2.2KW, 10A	AC 220V, 2.7KW, 12A
Accessories (Option)		Cart : 580(W) × 750(H) × 630(L)mm	Cart : 580(W) × 750(H) × 630(L)mm	Cart : 620(W) × 750(H) × 760(L)mm
Weight		55Kg	76Kg	95Kg


The specifications are subject to change without prior notice for improvement

## ● OPTIONAL ACCESSORIES

### ■ Series 200



### ■ Series 410

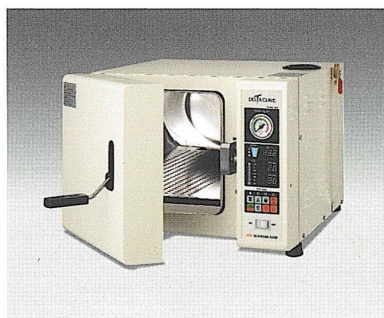

### ■ Series 600

